
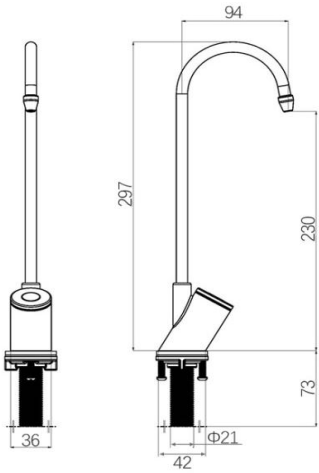




BESTWARE HARDWARE PRODUCTION CO., LTD.

Block 8, No. 6, Jianda Nan Road, Jiangmen, Guangdong, China
Tel. 86-750-3108801 Web: www.bestware.net.cn

TECHNICAL DATA SHEET

	Photo	Dimension
Product		

DESCRIPTION

Item No: SBLTFM / SBLTFB

Designation: Touch-Free bottle filling tap

Feature:

- Infrared activated tap
- Battery or main powered options
- 304 grade stainless steel construction
- Aggressive spray at low flow rate
- Suitable for reflective surfaces with unique sensor design

TECHNICAL DATA

- Drill hole: 21mm
- Water flow stops within 6 seconds of staying hands at sensor
- Battery supply: 2x CR123 (3V lithium battery) = 6V
- Plug Power supply: OUTPUT - 6V,0.5A 3W | INPUT - 100~240Vac, 50/60Hz, 0.15A (Plugs can be adjusted according to different countries)
- All parts are NSF approved

SENSOR RANGE ADJUSTMENT

Remove or disconnect the power supply (battery or mains) and leave it for 1 min. Reconnect again and the sensor LED will start flashing red, immediately place hand at 4~6cm away from the sensor until it stops flashing. The sensor distance is set.

IMPORTANT NOTE

- Recommend working pressure is 1 to 5 bar
- Resistant to temperature from 5°C to 55°C
- Set the sensor distance at 18cm maximum from the product
- Keep sensor away from direct sunlight to avoid damage
- Please install by a qualified technician in accordance with manufacturer's instructions and local regulations.