



**BESTWARE HARDWARE PRODUCTION CO., LTD.**


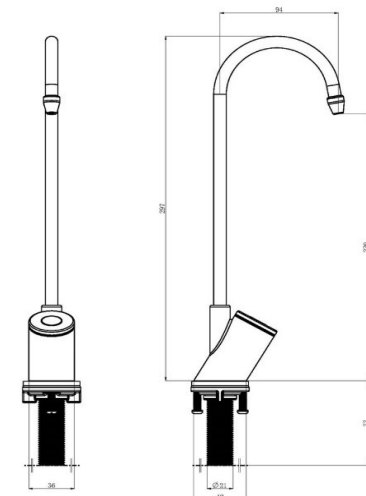
Block 8, No. 6, Jianda Nan Road, Jiangmen, Guangdong, China

Tel: 86-750-3108801

Fax:86-750-3378801

Web:www.bestware.net.cn

## TECHNICAL DATE SHEET

Product	Photo	Dimension
	 <p data-bbox="287 828 446 873">① OR ② mains supply or battery-operated</p> <p data-bbox="478 828 718 873">Our International Plug Adapter Kit contains all needs for any where in the world.</p>	

### DESCRIPTION

**Item No:** SBLTF

**Designation:** Touch-Free deck mount tap

**Feature:**

- Infrared activated tap
- Battery or main powered options
- 304 grade stainless steel construction
- Aggressive spray at low flow rate
- Suitable for reflective surfaces with unique sensor design

### TECHNICAL DATA

- Drill hole :21mm
- Water flow stops within 6 seconds of staying hands at sensor
- Battery supply:3V
- Plug Power supply: OUTPUT:5V,1.2A | INPUT:100~240V,50/60HZ,0.15A  
(Plugs can be adjusted according to different countries)
- All parts are NSF approved

### SENSOR RANGE ADJUSTMENT

Remove or disconnect the power supply (battery or mains) and leave it for 1 min. Reconnect again and the sensor LED will start flashing red, immediately place hand at 4~6cm away from the sensor until it stops flashing. The sensor distance is set.

### IMPORTANT NOTE

- Recommend working pressure is 1 to 5 bar
- Resistant to temperature from 5°C to 55°C
- Set the sensor distance at 18cm maximum from the product
- Keep sensor away from direct sunlight to avoid damage
- Please install by a qualified technician in accordance with manufacturer's instructions and local regulations.